



LAKES PRECISION^{INC.}

Your Global Source for Wire Processing Perishable Tooling

CUTTY MACHINE SERIES

THIS SECTION CONTAINS BLADES FOR THE CUTTY *WS-100* MACHINE SERIES

Your Global Source for Wire Processing Perishable Tooling

www.lakesprecision.com

CUTTY WS-100 MACHINE SERIES


UNIVERSAL / LEFT & RIGHT STRIP BLADES CLASS: UN-V

UNIVERSAL STRIP BLADES

The sharp edge is ground at an angle that results in a “V” opening of exactly 90 degrees.


Characteristics: 90 degree angle is widely accepted as the best entry angle to use for processing a wide range of wire sizes using the same blade setup. Most of the time, this class of blade incorporates a sharp edge ground to a very small or non-existing radius. It works sufficiently for most of standard wall insulation but is marginal for thin wall, cross-linked PVC, very rubbery insulations, woven fiber or thin-walled multi-conductors.

- TC Coating Available -

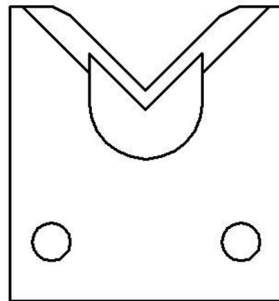

122159-XX

ITEM NUMBER	DESCRIPTION
122159-1	LONG BLADE
122159-2	SHORT BLADE

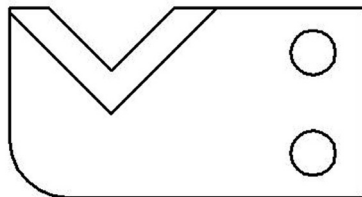


122235-1
LEFT BLADE

ITEM NUMBER	DESCRIPTION
122235-1	LEFT BLADE
122235-2	RIGHT BLADE

122235-XX

(1) 122235-1 & (1) 122235-2 = PAIR

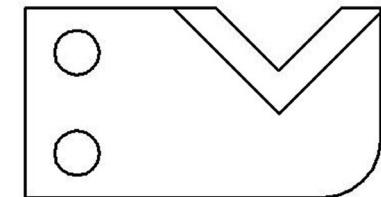

122235-2
RIGHT BLADE